



```

    CMP();
    if (la == "else") {
        terminal("else");
        CMP();
    }
} else if (la == "if") {
    terminal("if");
    if (la == '=') {
        terminal('=');
        EXP();
    } else if (la == '[') {
        terminal('[');
        EXP();
        terminal(']');
        terminal('=');
        EXP();
    } else {
        error();
    }
} // if
} else {
    error();
} // if
} // CMP()


```

variante: Última alternativa pode ser caso default

~ 1



2.b) ambiguidade de do else:  $if \{ \dots \} else$

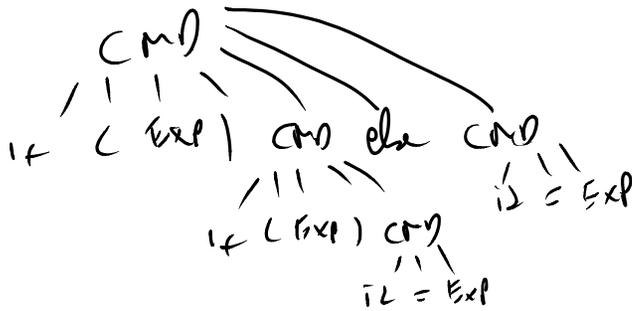

```

3. void P() {
    int selvo = atuel;
    try {
        terminal('a');
        P();
        terminal('a');
    } catch (falha f) {
        atuel = selvo;
    }
}
  
```